


Lift and slide door

Classic IV 78

- Flush design
- 180 mm construction depth
- Available with triple glazing

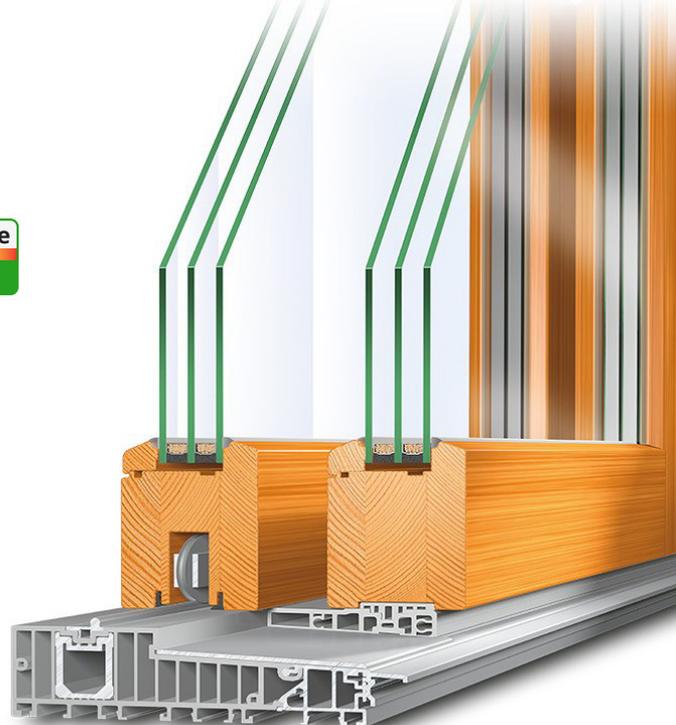

Energy saving through new windows

U _w value (old)	3.50 W/(m ² K)
U _w value (new)	0.94 W/(m ² K)
Window area	30 m ²
Annual fuel oil savings	1090 litres
Annual carbon dioxide reduction	2,943 kg

Explanation

Heating degree days	4,050
Conversion factor kilogram into litres of heating oil	1.19
Conversion of calorific value Wh/kg	11,800
Heating efficiency	0.75

SAFETY EQUIPMENT / FITTING

BASIS:

- 2 locking bolts
- Top guide rail prepared for SoftClose
- Threshold, protective trim in wood standard 20 mm
- Max. sash weight 450 kg

OPTIONAL:

- Safety levels: 4-fold locking, RC2, according to EN 1627-1630
- Comfort gears
- Lock monitoring according to VDI
- Fitting up to 600 kg
- SoftClose, handle side, fixed side or both sides
- Aerocontrol magnetic contact for electronic monitoring
- Handicapped accessible threshold
- Threshold, protective trim in wood 50 mm or 90 mm

COLOURS

- All wood colours listed in the shop as well as wood RAL colours

Environmentally friendly water-based lacquers

- Lever/handle shell: white, EV1, F9, C33 medium bronze, RAL 8022 black brown

GLASS THICKNESS

28 mm to 42 mm

SEALS

- Centre joint with double seal
- 2 sealing levels in the sash area

SYSTEM VALUES

- Air permeability: Class 3 (according to EN 12207)
- Driving rain-proof: Class 4A (according to EN 12208)
- Water tightness against driving rain: Class B2 (according to EN 12210)

Please note:

The classes given here are minimum classes. For higher requirements please consult us.

THERMAL INSULATION

- Reference size 3500 x 2180 mm
- Minimum requirement according to GEG2020: $U_w = 1.3 \text{ W}/(\text{m}^2\text{K})$

Spruce

U_w lift and slide door (W/m²K) / $U_f = 1.1 \text{ W}/(\text{m}^2\text{K})$

U_g Glass according to EN 673	Type of edge spacer alu	Type of edge spacer KSD	Type of edge spacer Swis-spacer Ultimate
1.1	1.2	1.1	1.1
1.0	1.2	1.1	1.1
0.7	1.1	1.0 (0.99)	1.0 (98)
0.6	1.0	1.0 (0.96)	0.9 (0.94)

Pine, Larch, Meranti

U_w lift and slide door (W/m²K) / $U_f = 1.2 \text{ W}/(\text{m}^2\text{K})$

U_g Glass according to EN 673	Type of edge spacer alu	Type of edge spacer KSD	Type of edge spacer Swis-spacer Ultimate
1.1	1.2	1.2	1.2
1.0	1.2	1.1	1.1
0.7	1.1	1.0	1.0
0.6	1.1	1.0 (0.99)	1.0 (0.97)


Oak, Eucalyptus

U_w lift and slide door (W/m²K) / $U_f = 1.5 \text{ W}/(\text{m}^2\text{K})$

U_g Glass according to EN 673	Type of edge spacer alu	Type of edge spacer KSD	Type of edge spacer Swis-spacer Ultimate
1.1	1.3	1.2	1.2
1.0	1.3	1.2	1.2
0.7	1.2	1.1	1.1
0.6	1.1	1.0	1.0

U_w values < 1.0 W/(m²K) are shown with two decimal places in accordance with EN ISO 10077

U_w values > 1.0 W/(m²K) are shown with one decimal place according to EN ISO 10077, here with two decimal places for information purposes

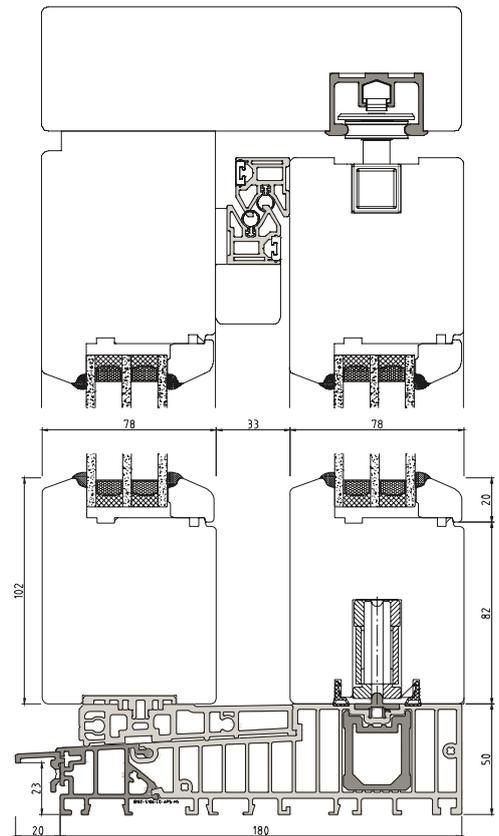


LIFT AND SLIDE DOOR WOOD
CLASSIC VI 78

POSSIBLE SCHEMAS:

SCHEMA A




SCHEMA C




POSSIBLE GLASS STRIPS:

STANDARD



classic

OPTIONAL



to 34 mm glass thickness
rustic