

DATA SHEET

IDEALU Classicline IV 78

U_w-Value
≥ 0.87



- Offset design
- 78 mm construction depth
- Available with triple glazing

Energy saving through new windows

U _w value (old)	3.50 W/(m ² K)
U _w value (new)	0.87 W/(m ² K)
Window area	30 m ²
Annual fuel oil savings	1066 litres
Annual carbon dioxide reduction	2,880 kg

Explanation

Heating degree days	4,050
Conversion factor kilogram into litres of heating oil	1.19
Conversion of calorific value Wh/kg	11,800
Heating efficiency	0.75

SAFETY EQUIPMENT / FITTING

BASIS:

- Fitting with 3 locking plates
- 3-dimensionally adjustable
- Anti mishandling device
- Sash lifter
- Max. sash weight 130 kg

OPTIONAL:

- Safety levels: RC1, RC2, according to EN 1627-1630
- SELECT fitting (concealed corner and shear bearings)
- "Tilt before Turn"
- High Control (magnetic contact for electronic monitoring)
- ActivPilot Comfort PAD (parallel stop fitting)

WOOD COLOURS

- Interior: all wood colours listed in the shop as well as wood RAL colours
- Exterior: all colours of the wood-alu colour spectrum listed in the shop

Environmentally friendly water-based varnishes

SOUND INSULATION

Tested to

R_w(C; C_{tr}) = 45 (-1, -4) dB

GLASS THICKNESS

From 33 mm to 52 mm

SEALS

- Centre sealing system
- 3 sealing levels, optional 4 (seal in the frame shell)

SYSTEM VALUES

- Air permeability: Class 3 (according to EN 12207)
- Driving rain-proof: Class 4A (according to EN 12208)
- Water tightness against driving rain:
Class C3/B3 (according to EN 12210)

Please note:

The classes given here are minimum classes. For higher requirements please consult us.

THERMAL INSULATION

- Reference size 1230 x 1480 mm
- Minimum requirement according to GEG2020 $U_w = 1.3 \text{ W/(m}^2\text{K)}$

Spruce

U_w window (W/m²K)

U_g Glass according to EN 673	Frame U_f value	Window U_w value Type of edge spacer alu	Window U_w value Type of edge spacer KSD
1.1	1.1	1.3	1.2
1.0	1.1	1.2	1.1
0.7	1.1	1.0	0.9 (0.93)
0.6	1.1	1.0 (0.95)	0.9 (0.87)

Pine, Larch, Meranti

U_w window (W/m²K)

U_g Glass according to EN 673	Frame U_f value	Window U_w value Type of edge spacer alu	Window U_w value Type of edge spacer KSD
1.1	1.2	1.3	1.2
1.0	1.2	1.3	1.2
0.7	1.2	1.1	1.0 (0.97)
0.6	1.2	1.0 (0.99)	0.9 (0.91)


Oak, Eucalyptus

U_w window (W/m²K)


U_g Glass according to EN 673	Frame U_f value	Window U_w value Type of edge spacer alu	Window U_w value Type of edge spacer KSD
1.1	1.5	1.4	1.3
1.0	1.5	1.3	1.3
0.7	1.5	1.2	1.1
0.6	1.5	1.1	1.0

U_w values < 1.0 W/(m²K) are shown with two decimal places in accordance with EN ISO 10077

U_w values > 1.0 W/(m²K) are shown with one decimal place according to EN ISO 10077, here with two decimal places for information purposes

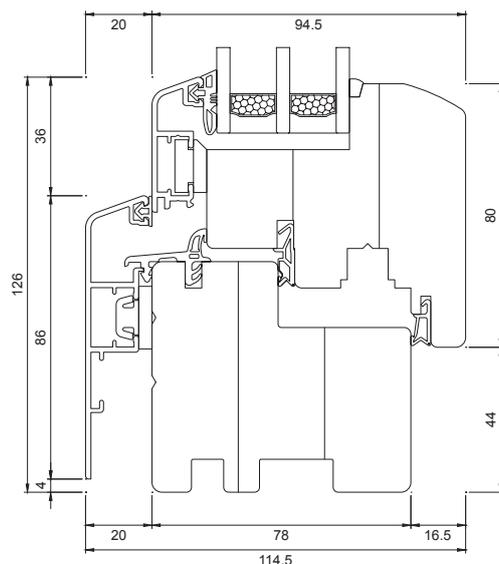


IDEALU CLASSICLINE IV 78 FRAME WITH SASH

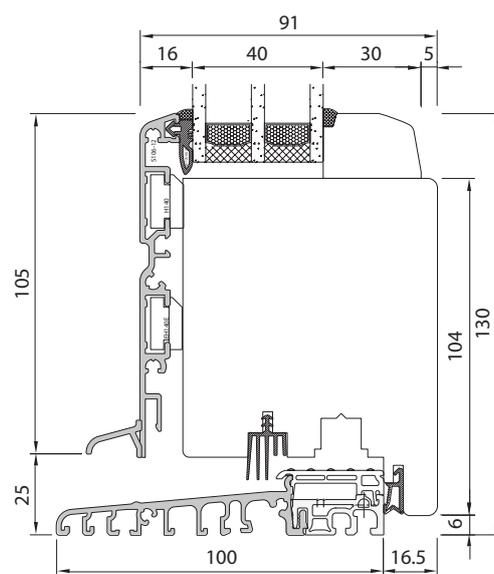

IDEALU CLASSICLINE IV 78
FRENCH DOORS WITH FLAT THRESHOLD

POSSIBLE GLASS STRIPS:

STANDARD



OPTIONAL

